

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 093 249 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

18.04.2001 Bulletin 2001/16

(51) Int Cl.7: H04L 12/18

(21) Application number: 00660182.7

(22) Date of filing: 09.10.2000

(84) Designated Contracting States:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE

Designated Extension States:

AL LT LV MK RO SI

(30) Priority: 11.10.1999 FI 992188

(71) Applicant: Stonesoft Oy

00210 Helsinki (FI)

(72) Inventor: Artes, Jari

00180 Helsinki (FI)

(74) Representative: Pelin, Torolf

Berggren Oy Ab,

P.O. Box 16

00101 Helsinki (FI)

(54) A method for multicast transmission

(57) The invention relates to methods for transmission of data, more particularly for transmission of data in clustered structures in IP networks. According to the invention, the cluster units are configured to be members of an IP multicast group specific to the cluster. The switch or switches directly connected to the cluster units are arranged to monitor multicast group membership reports from the cluster units, and therefore obtain knowledge about which ports of the switch or switches are connected to cluster units. Advantageously, the switch or switches may also send membership queries to find out, which ports are connected to members of the cluster multicast group. Consequently, when the switch receives a packet with a multicast MAC address and the IP address of the cluster, the switch sends the packet to only those ports to which cluster units are connected, and not to all ports of the switch as according to the prior art.

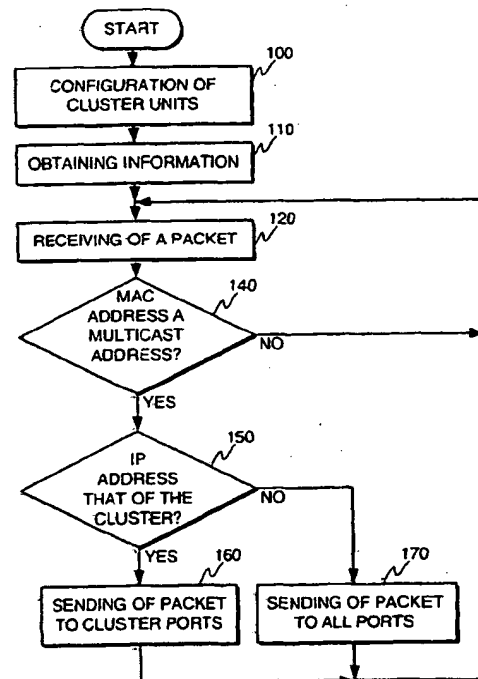


Fig. 3

EP 1 093 249 A2

Description

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0001] The invention relates to methods for transmission of data, more particularly for transmission of data in clustered structures in IP networks. Especially, the invention is related to such a method as specified in the preamble of the independent method claim.

2. Description of Related Art

[0002] A gateway is typically understood as a device, which connects a first network to a second network. A server is typically understood as a device, which receives requests from a client, performs the requested act and sends results back to the client. Typically, a gateway is used to connect the local area network (LAN) of a company to the public Internet. The gateway typically acts as a firewall, i.e. screens incoming traffic according to a certain set of rules to protect the local area network and data stored therein. Servers provide services to individual computers within the local area network, such as database services, disk services, and so on.

[0003] Gateway clusters and server clusters are used, when the capacity of a single device is not sufficient. Compared to a single device, gateway or server clusters provide high availability and increased throughput. Figure 1 illustrates the structure of a gateway cluster. Figure 1 shows client computers 10 connected to a switch 20. The client computers 10, the switch 20, and form a local area network (LAN). The LAN is connected to an external network 50 through a gateway cluster consisting in this example of five gateways 30. The gateways 30 may for example function as firewall devices. The gateways 30 are connected to the external network 50 through a switch 20 and a router 40. The client computers are in figure 1 divided into three subnetworks A, B, and C.

[0004] Figure 2 illustrates a server cluster. Figure 2 shows client computers 10 connected to a switch 20, which together form a local area network (LAN). The switch connects the local area network to the server cluster, which in this example comprises five server computers 30. Figure 2 further illustrates mass storage units 60 connected to the server computers 30. The client computers are in figure 2 divided into three subnetworks A, B, and C.

[0005] In general, there are two basic methods to construct server and gateway clusters in a TCP/IP network. According to the first basic method, each server or gateway has a distinct IP address, and an external device redirects the requests or packets to different servers or gateways. The external device has a certain set of rules for controlling the redirection of data packets. For example, the external device can redirect data packets on the

basis of current load on the cluster devices. In the example of figures 1 and 2, the external device can be the switch 20 connecting the LAN to the cluster. The main drawback of this solution is asymmetric routing: because routing in IP networks is usually based only on the destination IP address, outgoing and incoming packets can be routed to different gateways. This is a problem when the gateways also serve as firewalls, since firewalls typically do not accept any incoming messages, which are not a reply to a previous outgoing request. When the incoming packets are routed to a second gateway which is a different gateway than the first gateway which sent the original outgoing request, they will be discarded since the second gateway does not have any knowledge about the previous request.

[0006] According to the second basic method, all units of the cluster share a common IP address and MAC (media access control) address, and therefore receive all traffic in both directions. The units of the cluster have filter functions at their inputs and outputs, which according to certain rules allow the processing of a packet by only one of the gateways, while the others ignore the packet. The rules are constructed in such a way that the same gateway processes the packets in both directions of a single connection, which allows normal firewall operation. The benefit of this solution is transparency and scalability. New servers or gateways can be added to the cluster without changing routing, i.e. unnoticed by the clients.

[0007] However, even the second basic method has its drawbacks. Connecting multiple servers or gateways sharing a common MAC address to a switch requires usually usage of a multicast MAC address for the cluster, i.e. a hardware layer address which is recognized and processed by the network interface of every unit of the cluster. The network interfaces of the gateways always have individual MAC addresses as well, but in this solution, the interfaces are arranged to recognize the multicast MAC address selected for the cluster. The IP address of the server or gateway cluster is mapped to a multicast MAC address in the ARP (Address Resolution Protocol) tables of the nodes of the IP network. When a client wishes to send a data packet to the cluster, it addresses the packet to the IP address of the cluster. The network translates the IP address to a MAC address for transportation on the physical layer, and in this case the MAC address is a multicast address. The problem with multicast MAC addresses is that switches typically flood packets having a multicast address as destination to all ports of the switch by default, wherefore the packet ends up in all other subnetworks connected to other ports of the switch. This effect causes an unnecessary loading of other subnetworks connected to other ports of the switch than the gateways/servers of the cluster. This is a severe problem, if the LAN is divided into virtual LAN networks (VLAN).

[0008] Virtual LANs (VLAN) can be created using switches to segment networks. A single segment is a

broadcast domain, i.e. broadcast, multicast and unknown unicast frames are sent to all stations in the segment. Port-based virtual LAN networks are groups of switch ports and attached segments (subnetworks) which belong to the VLAN.

SUMMARY OF THE INVENTION

[0009] An object of the invention is to realize a method for transmission of data in an IP packet network, which avoids the problems of the prior art.

[0010] The objects are reached by using the IGMP protocol to inform the switch, which of its ports are connected to units of a cluster system, and forwarding those packets with the unicast IP address of the cluster system and the multicast MAC address of the cluster system only to those ports.

[0011] The method according to the invention is characterized by that, which is specified in the characterizing part of the independent method claim. The cluster system according to the invention is characterized by that, which is specified in the characterizing part of the independent claim directed to a cluster system. The dependent claims describe further advantageous embodiments of the invention.

[0012] The invention is applicable to gateway clusters as well as server clusters. In the following, the single unit of cluster i.e. a gateway or a server is denoted a cluster unit.

[0013] According to the invention, the cluster units are configured to be members of an IP multicast group specific to the cluster. The switch or switches directly connected to the cluster units are arranged to monitor multicast group membership reports from the cluster units, and therefore obtain knowledge about which ports of the switch or switches are connected to cluster units. Advantageously, the switch or switches may also send membership queries to find out, which ports are connected to members of the cluster multicast group. Consequently, when the switch receives a packet with a multicast MAC address and the unicast IP address of the cluster, the switch sends the packet to only those ports to which cluster units are connected, and not to all ports of the switch as according to the prior art. In the local area network, the unicast IP address of the cluster is mapped to a multicast MAC address in the routing tables in the network. Therefore, when any client sends a packet to the cluster, the switch will receive the packet with a multicast MAC destination address.

[0014] For obtaining this functionality, the switch is arranged to recognize the unicast IP address of the cluster and the multicast group address configured for the cluster, and to store into its memory information about which ports are connected to such network nodes, which send group membership reports for the multicast group address configured for the cluster.

[0015] According to the IGMP protocol (Internet Group Management Protocol), network nodes send a

group membership report when they join a multicast group to announce their presence to multicast routers. The report is sent with an IP destination address equal to the host group address being reported, so that the multicast router can recognize which multicast groups have members in its domain. A multicast router sends an IGMP query at regular intervals to see if any nodes belong to any multicast groups. Network nodes send a group membership report, when they receive a group membership query from the router. According to the invention, this mechanism is used to inform the switch about which ports are connected to cluster units. The IGMP protocol version 1 is defined in the IETF standard document RFC 1112, and IGMP version 2 is defined in the IETF proposed standard document RFC 2236.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] The invention is described in more detail in the following with reference to the accompanying drawings, of which

Figure 1 illustrates a gateway cluster arrangement according to prior art,

Figure 2 illustrates a server cluster arrangement according to prior art,

Figure 3 illustrates a method according to an advantageous embodiment of the invention,

Figure 4 illustrates another method according to an advantageous embodiment of the invention, and

Figure 5 illustrates a cluster system according to an advantageous embodiment of the invention.

[0017] Same reference numerals are used for similar entities in the figures.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

A. A FIRST GROUP OF ADVANTAGEOUS EMBODIMENTS

[0018] Figure 3 illustrates a method according to an advantageous embodiment of the invention. Figure 3 illustrates a method for transmission of data in an IP packet network, which network comprises a cluster of cluster units and a switching unit having a plurality of ports, and in which network the cluster units are connected to a part of the plurality of ports, and which cluster units share a unicast IP address.

[0019] According to the present embodiment, the method comprises at least steps, in which

- the cluster units are configured to be members

- of an IP multicast group specific to the cluster, the IGMP protocol is used to obtain 110 information about to which ports of the plurality of ports the cluster units are connected.
- the MAC address of a received IP packet is checked in step 140, and if said MAC address is found to be a multicast MAC address, the IP destination address of said packet is compared 150 to the unicast IP address shared by the cluster units,
- if the IP destination address of said packet is the same as the unicast IP address, the packet is forwarded 160 to those ports, to which the cluster units were found to be connected, and if it is not, the packet is sent to all ports of the switch.

[0020] Figure 4 illustrates as an example how the step 110 of obtaining information is performed according according to an advantageous embodiment of the invention. According to this embodiment, the method further comprises at least steps, in which the switching unit receives 114 an IGMP group membership report, the switching unit checks 116, if said report is addressed to said IP multicast group specific to the cluster, and if it is, the switching unit stores 118 into its memory the identifier of the port, through which said report arrived.

[0021] Advantageously, the method may as well comprise a step, in which an IGMP group membership query is sent 112 by the switching unit.

[0022] In the inventive method, the IGMP protocol version 1 according to RFC 1112 can be used, as well as the IGMP protocol version 2 according to RFC 2236.

B. A SECOND GROUP OF ADVANTAGEOUS EMBODIMENTS

[0023] Figure 5 illustrates a cluster system according to an advantageous embodiment of the invention. Figure 5 shows client computers 10 connected to a switch 200. The client computers 10, the switch 200, and form a local area network (LAN). The LAN is connected to an external network 50 through a gateway cluster consisting in this example of five gateways 30. The gateways 30 may for example function as firewall devices. The gateways 30 are connected to the external network 50 through a switch 200 and a router 40. The client computers are in figure 5 divided into three subnetworks A, B, and C. According to the embodiment shown in figure 5, the cluster system has a plurality of cluster units 30 and a switching unit 200, and said cluster units are associated with the same IP unicast address. According to the embodiment, the cluster units are configured to be members of an IP multicast group specific to the cluster system, and the cluster system comprises

- means 240 for observing using the IGMP protocol which ports of the switching unit are connected to the cluster units,
- means 210 in the switching unit for observing the

MAC destination address of a packet arriving to the switching unit and for checking if said MAC destination address is a MAC multicast address,

- means 220 in the switching unit for observing the IP destination address of said packet and for comparing said IP destination address to said IP unicast address associated with the cluster units,
- means 230 in the switching unit for forwarding of the packet to those ports whose identifiers were previously stored to said memory means as a response to the finding that said IP destination address and said IP unicast address are the same and said MAC destination address is a MAC multicast address.

[0024] In a further advantageous embodiment of the invention, said means 240 for observing using the IGMP protocol comprise at least

- means 242 in the switching unit for observing IGMP multicast group reports and for checking, if a received IGMP multicast group report is addressed to said IP multicast group specific to the cluster system, and
- means 244 in the switching unit for storing into a memory means an identifier of that port via which said received IGMP multicast group report arrived as a response to finding that said report was addressed to said IP multicast group.

[0025] In a still further advantageous embodiment of the invention, the system further comprises means 260 in the switching unit for sending IGMP group membership queries.

[0026] In an advantageous embodiment of the invention, said means 210, 220, 230, 240, 242, 244, 250, and 260 are realized using software programs stored in a memory element 270 of the switching unit 200 and executed by a processor 280 of the switching unit 200.

[0027] In another advantageous embodiment of the invention, said means 210, 220, 230, 240, 242, 244, 250, and 260 are realized using dedicated logic circuits implemented for example using an ASIC circuit (application specific integrated circuit). Such an implementation of the invention allows the functioning of the switching unit at extremely high speeds.

[0028] In an advantageous embodiment of the invention, the cluster units 30 are gateway units 30.

[0029] In a further advantageous embodiment of the invention, the cluster units are server units.

C. FURTHER CONSIDERATIONS

[0030] The invention has several advantages. For example, the invention enables connecting gateway clusters to switches, which allows the construction of high-speed networks using port-based virtual local area networks.

[0031] The invention is applicable with IPv4 as well as IPv6 networks. The IP protocol version 4 is described in detail in the specification RFC 791. The next version of the IP protocol, known as IPv6, is described in the specification RFC 1883.

[0032] In view of the foregoing description it will be evident to a person skilled in the art that various modifications may be made within the scope of the invention. While a preferred embodiment of the invention has been described in detail, it should be apparent that many modifications and variations thereto are possible, all of which fall within the true spirit and scope of the invention.

Claims

1. Method for transmission of data in an IP packet network comprising a cluster of cluster units, a switching unit having a plurality of ports, the cluster units being connected to a part of the plurality of ports, which cluster units share a unicast IP address, **characterized** in that the method comprises at least steps, in which

- the cluster units are configured to be members of an IP multicast group specific to the cluster,
- the IGMP protocol is used to obtain information about to which ports of the plurality of ports the cluster units are connected,
- the MAC address of a received IP packet is checked, and if said MAC address is a multicast MAC address, the IP destination address of said packet is compared to the unicast IP address shared by the cluster units,
- if the IP destination address of said packet is the same as the unicast IP address, the packet is forwarded to those ports, to which the cluster units were found to be connected.

2. The method of claim 1, **characterized** in that it further comprises at least steps, in which

the switching unit receives an IGMP group membership report,
the switching unit checks, if said report is addressed to said IP multicast group specific to the cluster,
and if it is, the switching unit stores into its memory the identifier of the port, through which said report arrived.

3. The method of claim 1, **characterized** in that it comprises a step, in which an IGMP group membership query is sent by the switching unit.

4. The method of claim 1, **characterized** in that the IGMP protocol is protocol version 1 according

to RFC 1112.

5. The method of claim 1, **characterized** in that the IGMP protocol is protocol version 2 according to RFC 2236.

6. Cluster system having a plurality of cluster units and a switching unit, said cluster units being associated with the same IP unicast address, **characterized** in that

- the cluster units are configured to be members of an IP multicast group specific to the cluster system,

and in that, that the system comprises

- means for observing using the IGMP protocol which ports of the switching unit are connected to the cluster units,
- means in the switching unit for observing the MAC destination address of a packet arriving to the switching unit and for checking if said MAC destination address is a MAC multicast address,
- means in the switching unit for observing the IP destination address of said packet and for comparing said IP destination address to said IP unicast address associated with the cluster units,
- means in the switching unit for forwarding of the packet to those ports whose identifiers were previously stored to said memory means as a response to the finding that said IP destination address and said IP unicast address are the same and said MAC destination address is a MAC multicast address.

7. The system according to claim 6, **characterized** in that said means for observing using the IGMP protocol comprise at least

- means in the switching unit for observing IGMP multicast group reports and for checking, if a received IGMP multicast group report is addressed to said IP multicast group specific to the cluster system, and
- means in the switching unit for storing into a memory means an identifier of that port via which said received IGMP multicast group report arrived as a response to finding that said report was addressed to said IP multicast group.

8. The system according to claim 6, **characterized** in that it further comprises means in the switching unit for

sending IGMP group membership queries.

9. The system according to claim 6, characterized in that the cluster units are gateway units.

5

10. The system according to claim 6, characterized in that the cluster units are server units.

10

15

20

25

30

35

40

45

50

55

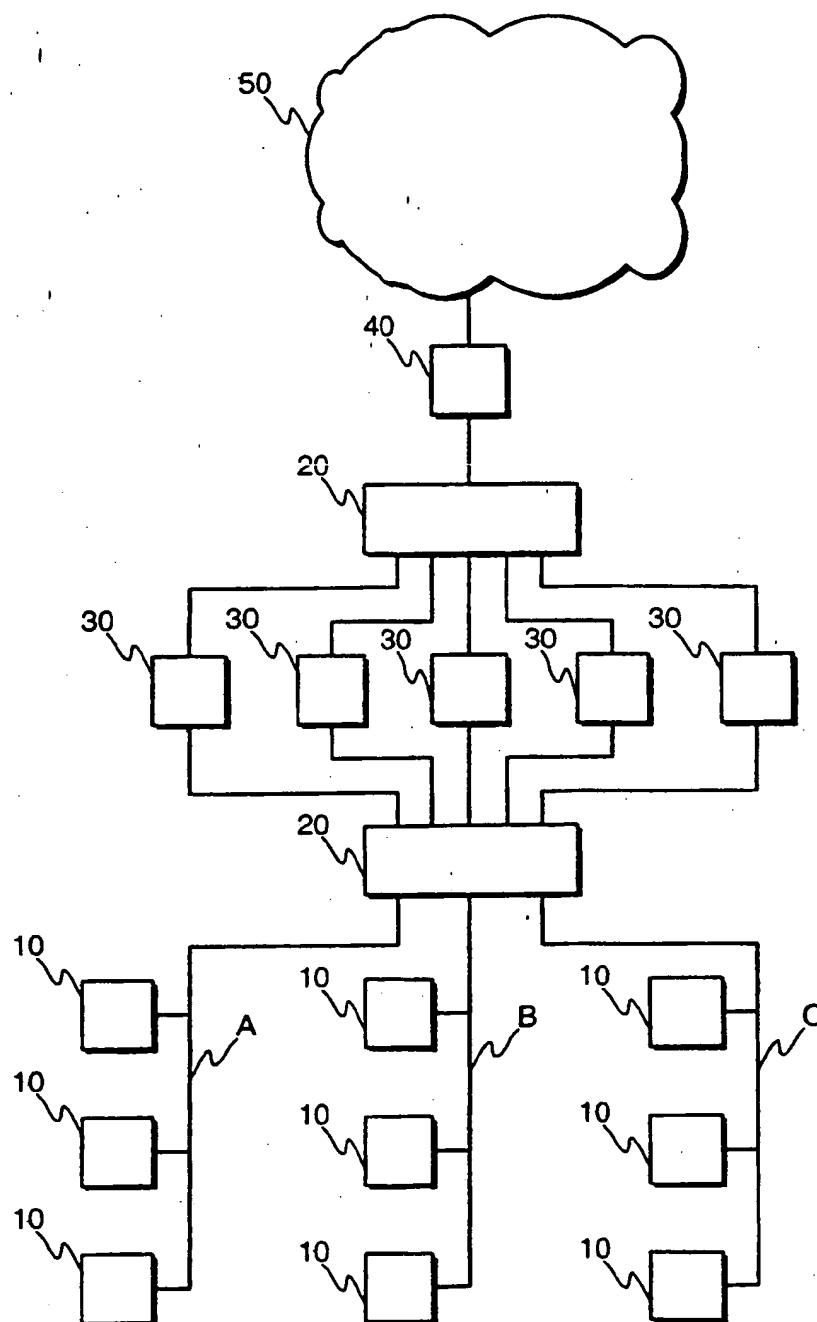


Fig. 1
PRIOR ART

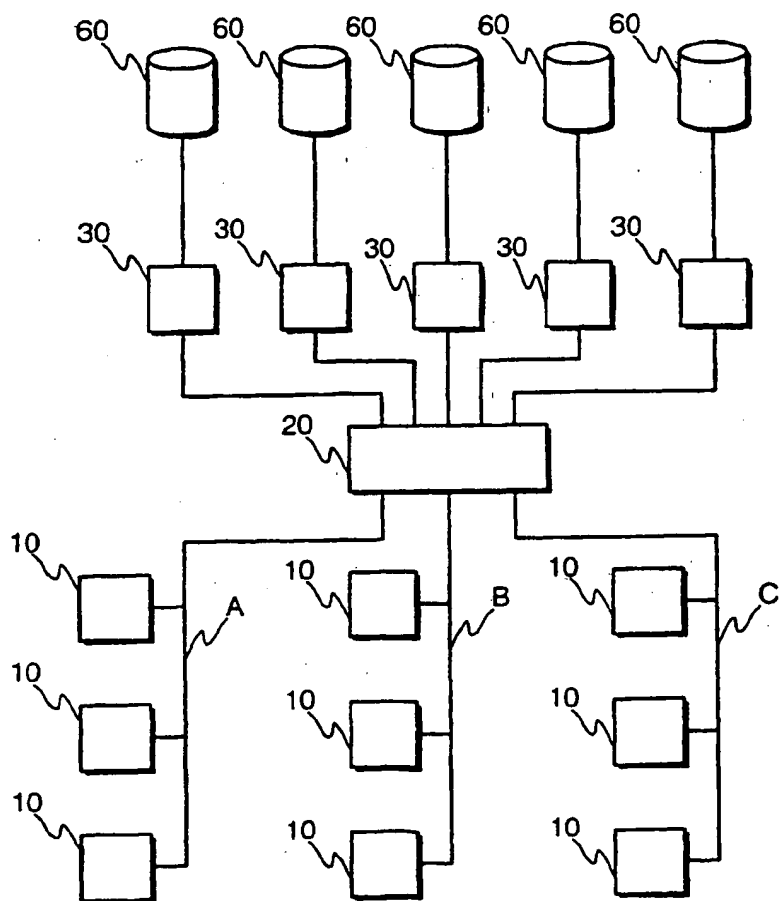
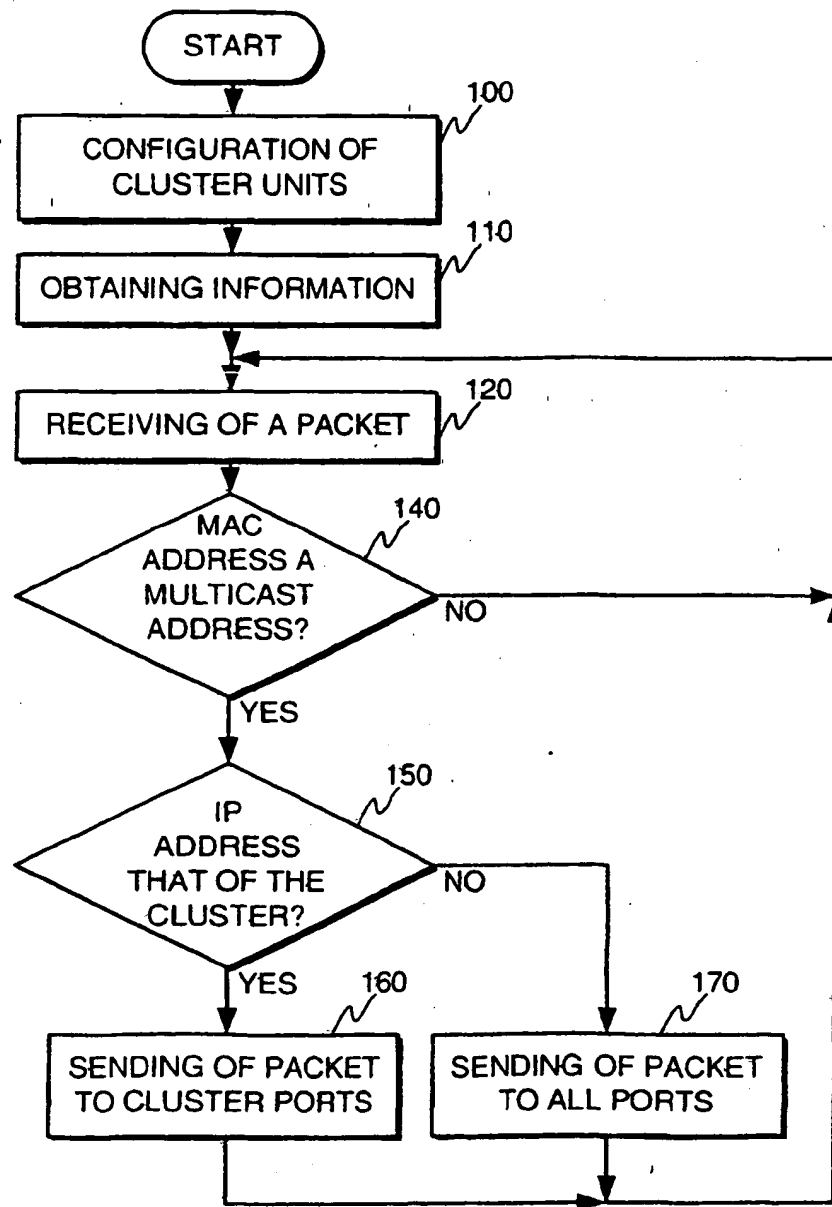
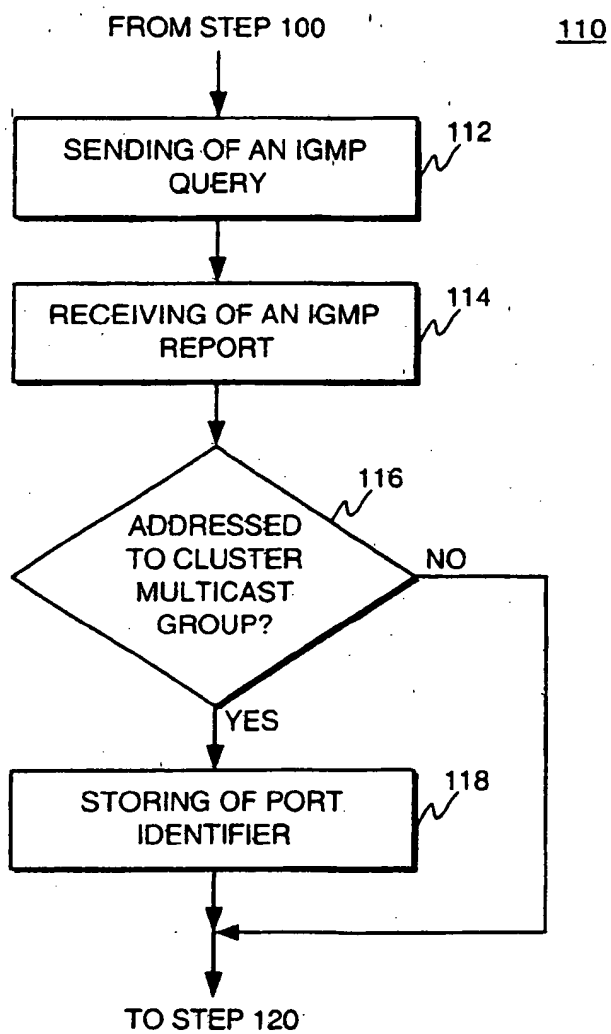


Fig. 2
PRIOR ART

**Fig. 3**

**Fig. 4**

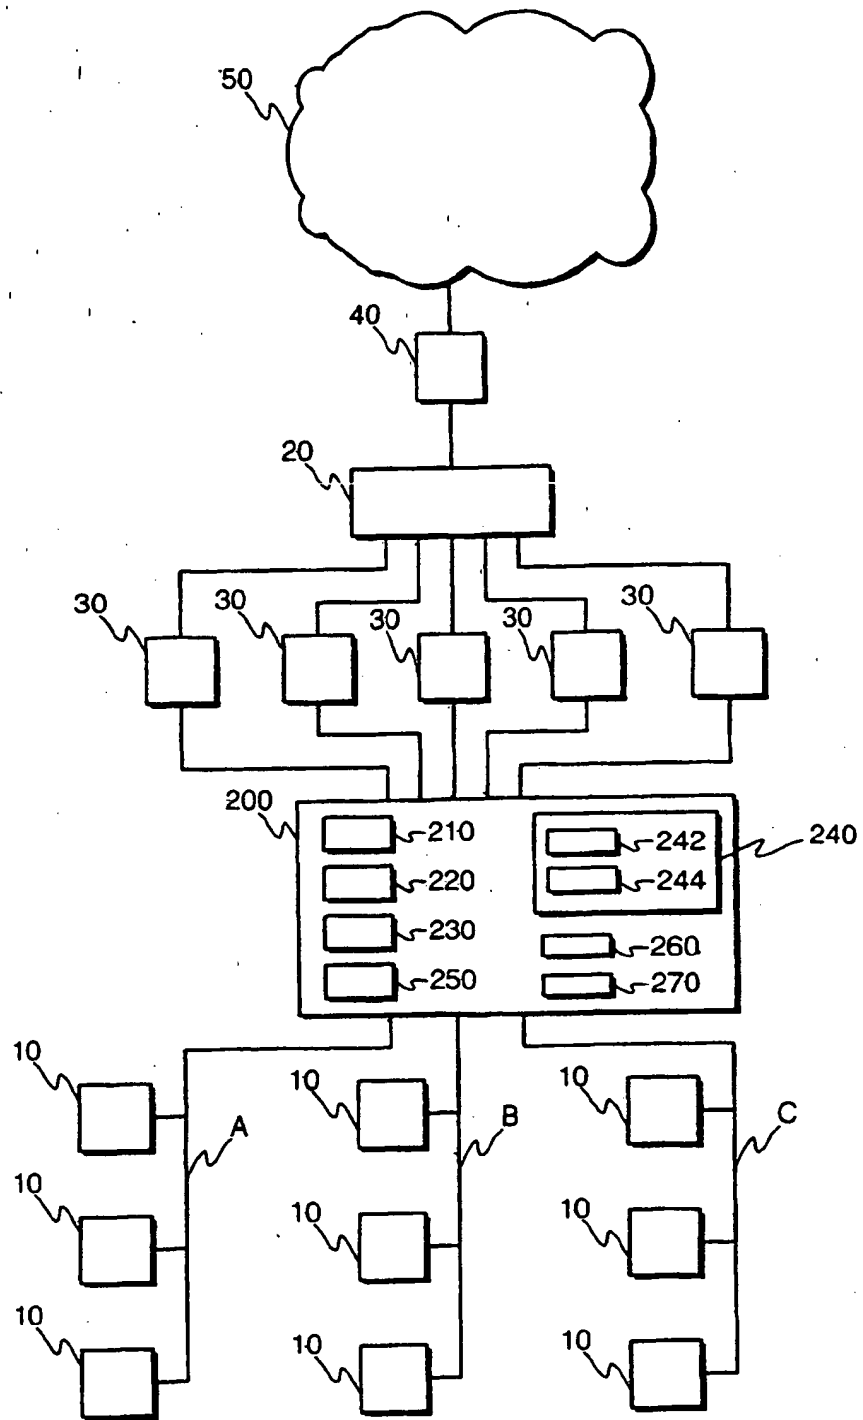


Fig. 5



(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
12.02.2003 Bulletin 2003/07

(51) Int Cl.7: **H04L 12/18, H04L 12/46,
H04L 29/06**

(43) Date of publication A2:
18.04.2001 Bulletin 2001/16

(21) Application number: **00660182.7**

(22) Date of filing: **09.10.2000**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: **Artes, Jari**
00180 Helsinki (FI)

(74) Representative: **Äkräs, Tapio**
Kolster Oy Ab,
Iso Roobertinkatu 23
00120 Helsinki (FI)

(30) Priority: **11.10.1999 FI 992188**

(71) Applicant: **Stonesoft Corporation**
00210 Helsinki (FI)

(54) **A method for multicast transmission**

(57) The invention relates to methods for transmission of data, more particularly for transmission of data in clustered structures in IP networks. According to the invention, the cluster units are configured to be members of an IP multicast group specific to the cluster. The switch or switches directly connected to the cluster units are arranged to monitor multicast group membership reports from the cluster units, and therefore obtain knowledge about which ports of the switch or switches are connected to cluster units. Advantageously, the switch or switches may also send membership queries to find out, which ports are connected to members of the cluster multicast group. Consequently, when the switch receives a packet with a multicast MAC address and the IP address of the cluster, the switch sends the packet to only those ports to which cluster units are connected, and not to all ports of the switch as according to the prior art.

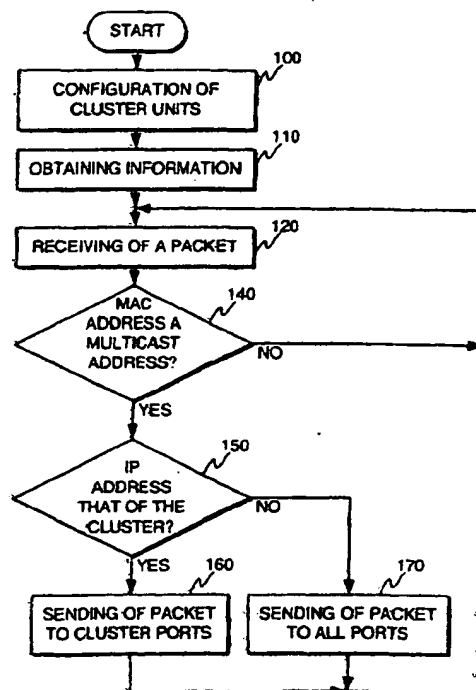


Fig. 3

EP 1 093 249 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 66 0182

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (In I.C.L.7)
A	WO 99 33227 A (HOLONTECH CORPORATION) 1 July 1999 (1999-07-01) * page 10, line 27 - page 12, line 2 *	1-10	H04L12/18 H04L12/46 H04L29/06
A	EP 0 865 180 A (LUCENT TECHNOLOGIES INC) 16 September 1998 (1998-09-16) * column 6, line 35 - line 52 * * column 10, line 29 - column 11, line 14 *	1-10	
A	WO 99 37061 A (CABLETRON SYSTEMS INC) 22 July 1999 (1999-07-22) * page 2, line 16 - page 4, line 19 *	1-10	
			TECHNICAL FIELDS SEARCHED (In I.C.L.7)
			H04L
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
THE HAGUE		18 December 2002	Ströbeck, A.
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons S : member of the same patent family, corresponding document			

EPO FORM 1503 (03.02.02) (Pc/09/1)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 66 0182

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

18-12-2002

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9933227 A	01-07-1999	US 6266335 B1	24-07-2001
		AU 1803099 A	12-07-1999
		CA 2319436 A1	01-07-1999
		EP 1048145 A1	02-11-2000
		WO 9933227 A1	01-07-1999
EP 0865180 A	16-09-1998	US 6470389 B1	22-10-2002
		CA 2230550 A1	14-09-1998
		EP 0865180 A2	16-09-1998
WO 9937061 A	22-07-1999	US 6112251 A	29-08-2000
		AU 736508 B2	26-07-2001
		AU 2104399 A	02-08-1999
		CA 2318413 A1	22-07-1999
		EP 1048147 A1	02-11-2000
		WO 9937061 A1	22-07-1999
		US 6418480 B1	09-07-2002

EPO FORM P459

For more details about this annex : see Official Journal of the European Patent Office, No 12/82

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.